



Enertech Group



CTC 950

A compact wall mounted oil or gas-fired unit. The low Weight of the unit facilitates the installation

With built in heat exchanger that gives fresh hot water quickly and effectively. With DHW storage heater.


The heat exchanger produces fresh hot water according as you use it. The storage water heater stores the domestic hot water in an effective way.

A special sound absorbing air inlet on the burner part provides an absolute low noise operation.

The incorporated circulating pump, expansion vessel and safety valve control box guarantee a complete unit for comfortable heating.

Key features:

- Wall mounted oil or gas-fired unit
- High efficiency
- Easy installation
- Low weight
- Small dimensions
- Balanced flue system
- Unique heat transmission
- Easy maintenance
- Extremely low noise level
- Easy to service
- All connections downward

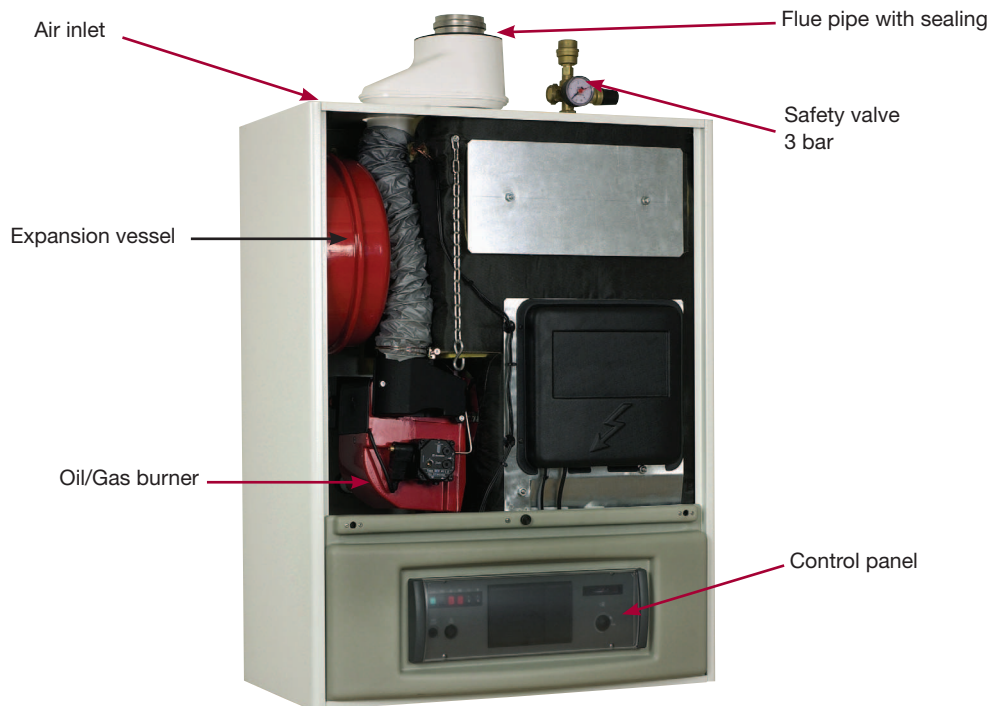

Technical data CTC 950	950 V	950 R
Output kW	23,3	
Input kW	25	
Working pressure bar	3	
Test pressure bar	4	
Burning efficiency %	92	
Fluegas temperature (in accordance to EN 303/304) °C	195	
Sanitary hot water T = 25°C l/min	13	-
Water content, l	23	
Flue gas outlet ø mm	80	
Air inlet ø mm	80/125	
Heating flow	R 3/4"	
Heating return	R 3/4"	
Sanitary hot/cold water	R 1/2"	-
Expansion vessel l	10	
Weight, kg	112	109
Measurements H/W/D, mm	904/700/570	

Scope of delivery

- Boiler CTC 950
- Burner of make Bentone
- Circulating pump
- Expansion vessel
- Heat exchanger*

Accessories
Control equipment Bentone Bas
Shunt valve

* Model with heat exchanger.

+46 372 880 00 Fax +46 372 861 55
www.ctcvarme.se
Box 309, 341 26 Ljungby

